


VigitLED

Indoor LED Module

- 
High Brightness
- 
High Definition & Contrast Ratio
- 
Modular Design for Easy Maintenance
- 
Energy Conservation

Energy Conservation

High Definition & Contrast Ratio

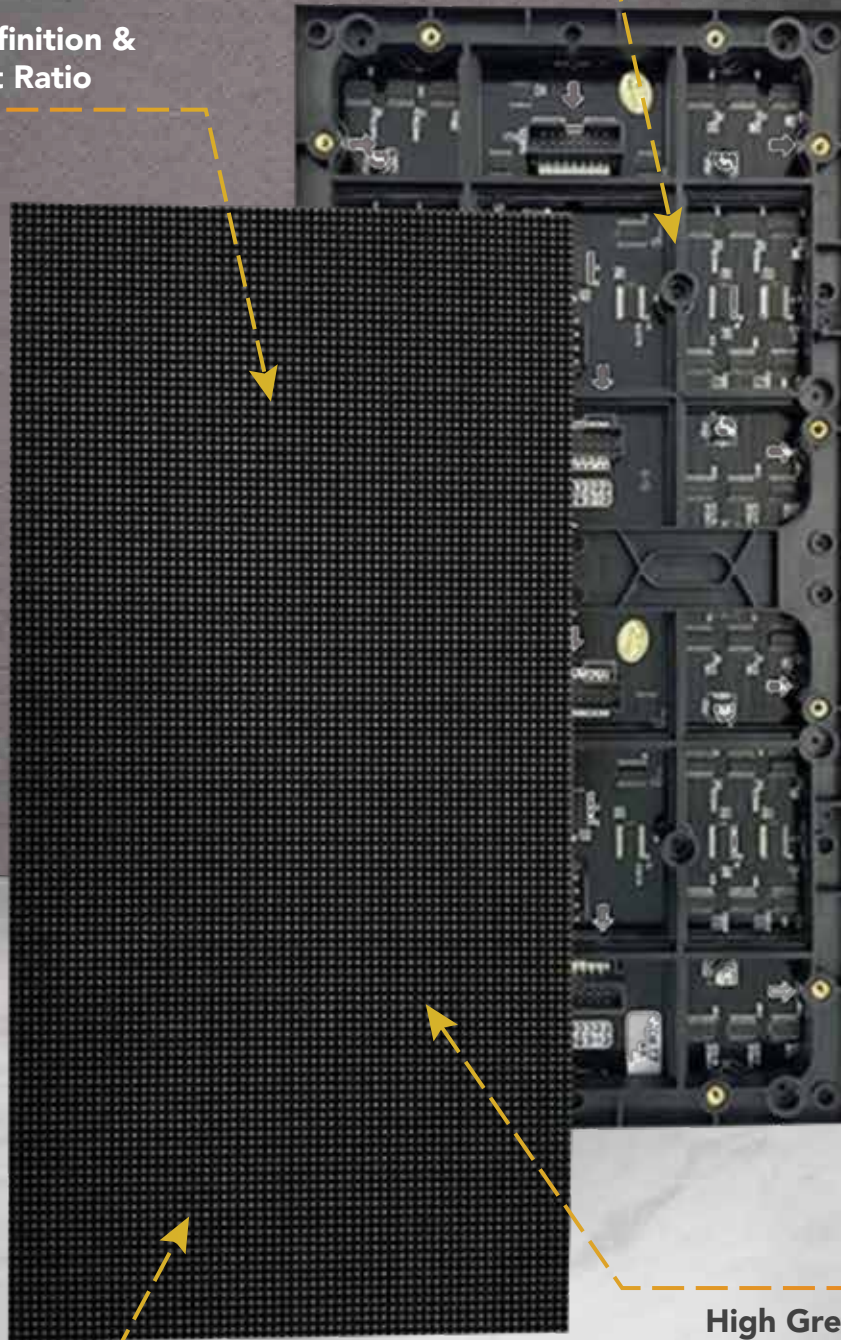

High Grey Scale

High Refresh Rate

Product Features



High Definition & Contrast Ratio



High Brightness



Wide Viewing Angle



3840Hz High Refresh Rate



Modular Design for Easy Maintenance




High Grey Scale



Energy Conservation

Dimension

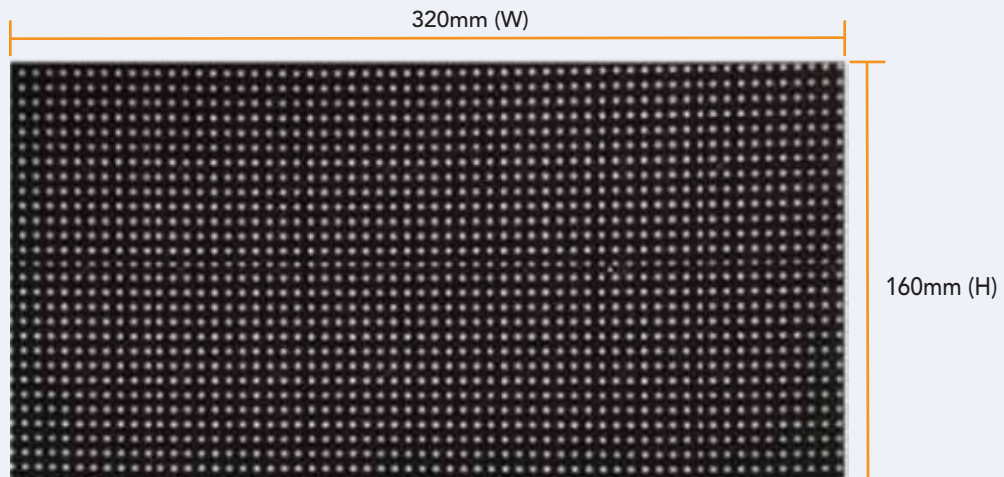

Technical Specifications

MODEL	VigitLED-X1.25	VigitLED-X1.538	VigitLED-X1.86	VigitLED-X2
Display				
LED Type	SMD 3-in-1			
Pixed Pitch (mm)	1.25	1.538	1.86	2
Module Resolution (px x px)	256 x 128	208 x 104	172 x 86	160 x 80
Pixel Density (pixels/m2)	640,000	422,753	289,050	250,000
Module Dimension (W x H x D)/mm	320 x 160 x 16			
Module Weight	0.45 ± 0.02KG	0.3 ± 0.02KG	0.37 ± 0.02KG	0.37 ± 0.02KG
Gray Scale	14~16 bits			
Refresh Rate	3840Hz			
Frame Rate	50 / 60			
Brightness (nits)	≥500			
Colour Temperature	2000 ~ 9500			
Contrast Ratio	5000 : 1			
Viewing Angle (V/H)	140° / 140°			
Input Voltage	4.5 ~ 5			
Maximum Current	≤6	≤5	≤5	≤6
Maximum Power Consumption	≤30	≤25	≤25	≤30
Storage Temperature (°C)	-20°C ~ +55°C			
Operating Temperature (°C)	-10°C ~ +45°C			
Storage Humidity	10%RH ~ 85% RH			
Operating Humidity (RH)	10%RH ~ 80% RH			
Lifespan (Hrs)	≥100000 hrs			

Technical Specifications

MODEL	VigitLED-X2.5	VigitLED-X3.076	VigitLED-X4
Display			
LED Type	SMD 3-in-1		
Pixed Pitch (mm)	2.5	3.076	4
Module Resolution (px x px)	128 x 64	104 x 52	80 x 40
Pixel Density (pixels/m2)	160,000	105,688	105,688
Module Dimension (W x H x D)/mm	320 x 160 x 16		
Module Weight	0.4 ± 0.02KG	0.27 ± 0.02KG	0.27 ± 0.02KG
Gray Scale	14~16 bits		
Refresh Rate	3840Hz		
Frame Rate	50 / 60		
Brightness (nits)	≥500		
Colour Temperature	2000 ~ 9500		
Contrast Ratio	5000 : 1		
Viewing Angle (V/H)	140° / 140°		
Input Voltage	4.5 ~ 5		
Maximum Current	≤6	≤5	≤5
Maximum Power Consumption	≤30	≤25	≤25
Storage Temperature (°C)	-20°C ~ +55°C		
Operating Temperature (°C)	-10°C ~ +45°C		
Storage Humidity	10%RH ~ 85% RH		
Operating Humidity (RH)	10%RH ~ 80% RH		
Lifespan (Hrs)	≥100000 hrs		

Applications

Meeting Room



Shopping Malls



Sales Gallery



Retail



Data & Command Centre



Airport




The Ultimate Digital Signage Management System

Manage Smarter, Engage Better, Perform Greater.

Everything You Need for a Smarter, Faster Signage

- Remote & Flexible Content Management
- Support for WiFi
- Unlimited Content Looping Playback
- Remote Content Scheduling
- Screen Splicing
- Screen On/Off
- Data Collection & Reporting
- Content Synchronization

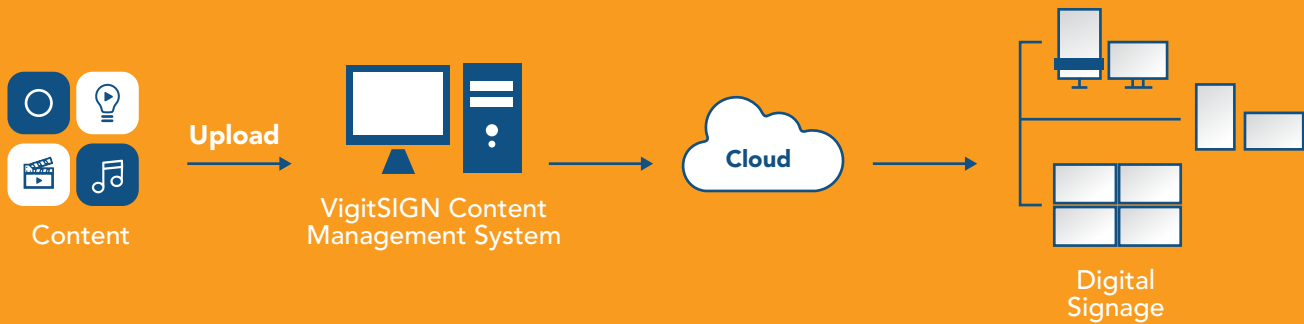

Effortlessly Track, Analyze & Optimize

Our signage software gives you easy-to-use tools to track performance, improve your content, and keep your hardware running smoothly.



100% Secure CLOUD Based System



Support for Multi-Level User Access




Cloud & Local USB Content Update



Live Layout Preview



Real-Time Hardware & Software Monitoring

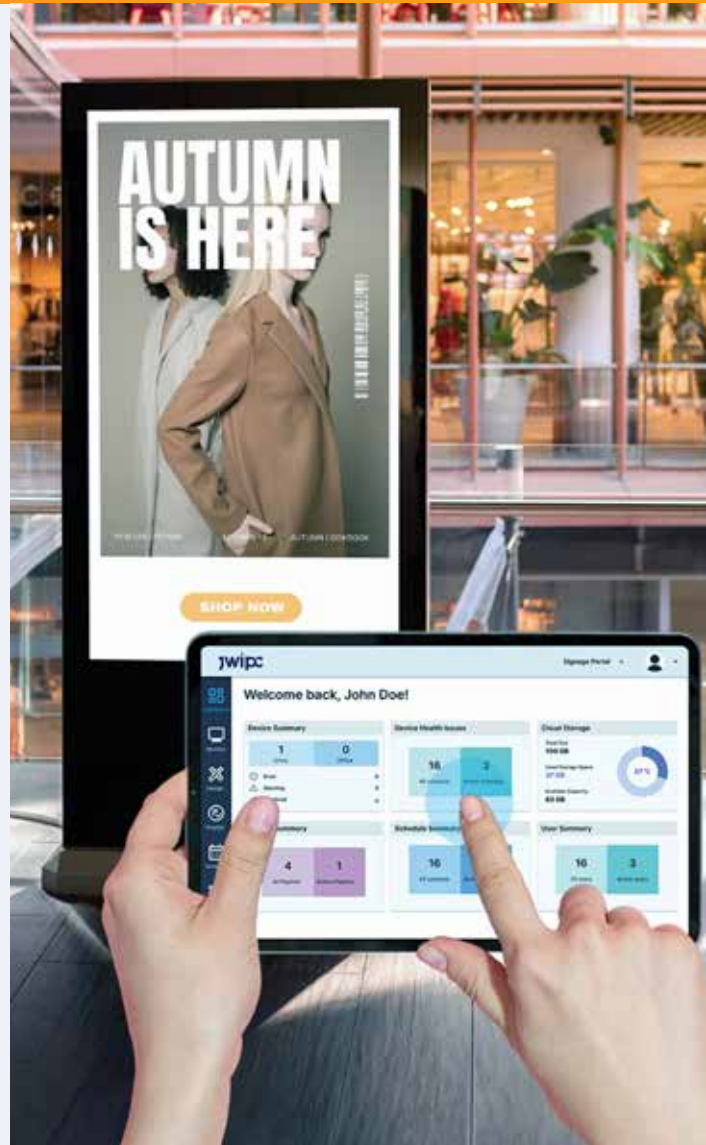






V-Series International Sdn Bhd

No. 17, Jalan Anggerik Mokara 31/53,
Kota Kemuning, 40460 Shah Alam,
Selangor D.E., Malaysia

Contact Us

 www.v-series.net
 +6011 1011 1181
 sales@v-series.net

