

VigitSIGN

Dual Sided Window Display

HD

HD Resolution



Narrow Bezel



Flexible Instalation

Reliable & Long
Lifespan

Adjustable Hanging Bracket Length

Aluminium Frame

Noiseless Design


perfumestore

PERFUME
NATURAL FRAGRANCE

Narrow Bezel

High Brightness

Key Features

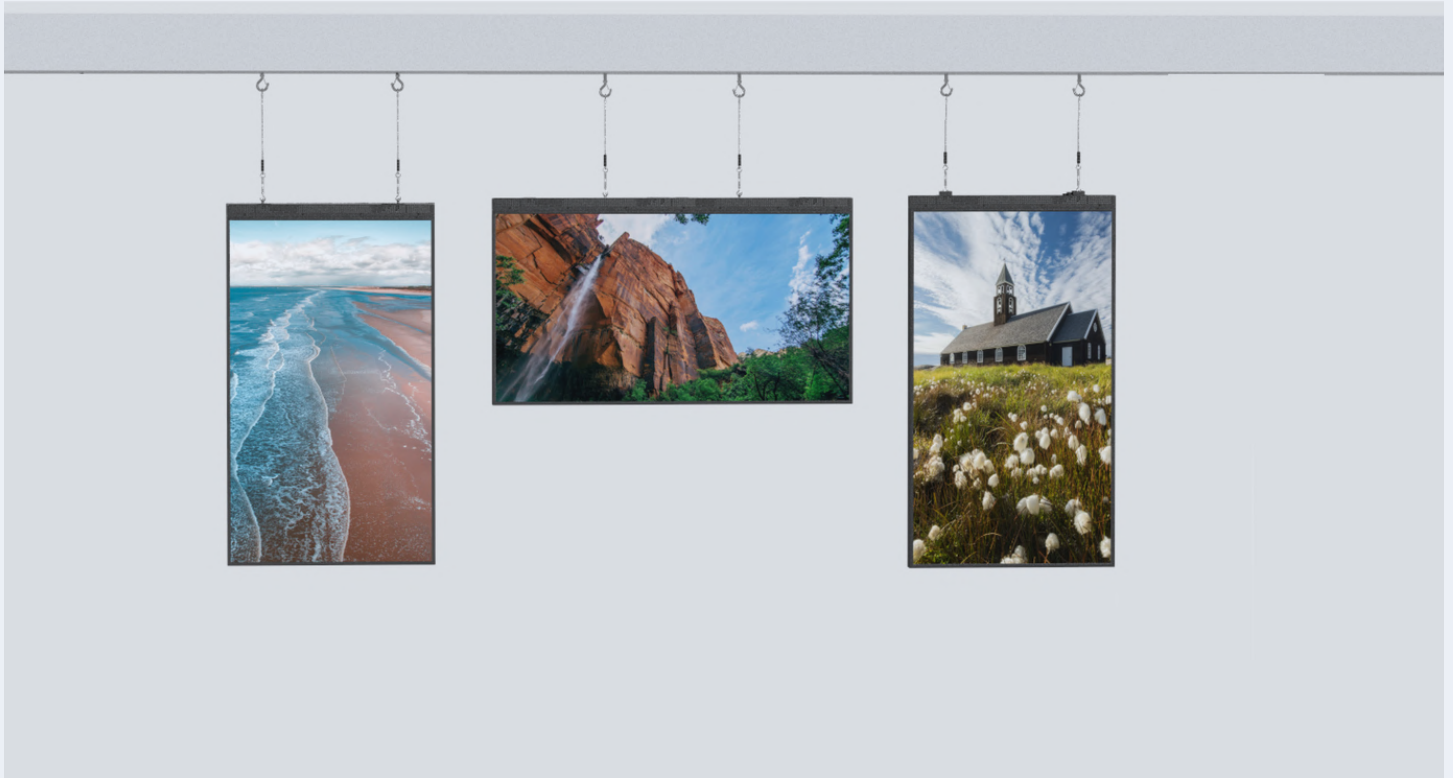

HD Resolution

Achieve the restoration of HD / 4K resolution original content, providing a lifelike visual experience.



Slim & Lightweight Design

Aluminum material for lightweight purposes, offering effortless installation and maintenance.



Narrow Bezel

A narrow bezel creates a seamless linking visual that enables captivating visual experiences.



Reliable & Long Lifespan

Industrial-grade LCD panel designed for dependable 24/7 operation. With an impressive 50,000-hour lifetime, it ensures a reliable long lifespan.



High Brightness & Contrast

With brightness up to 700nits for indoor usage and 3000nits for outdoor usage, and 3000:1 high contrast ratio, the display maintains excellent visibility and contrast in any lighting condition.



Flexible Installation

Landscape and portrait installation for flexibility in content design.

The Ultimate Digital Signage Management System


Manage Smarter, Engage Better, Perform Greater.

Everything You Need for a Smarter, Faster Signage

- Remote & Flexible Content Management
- Support for WiFi
- Unlimited Content Looping Playback
- Remote Content Scheduling
- Screen Splicing
- Screen On/Off
- Data Collection & Reporting
- Content Synchronization



Upload



Digital Signage

Effortlessly Track, Analyze & Optimize

Our signage software gives you easy-to-use tools to track performance, improve your content, and keep your hardware running smoothly.



100% Secure CLOUD Based System



Support for Multi-Level User Access



Cloud & Local USB Content Update



Live Layout Preview



Real-Time Hardware & Software Monitoring



Technical Specifications

Model: VW3201T ~ VW4301T

MODEL	VW3201T-0725	VW3201T-0735	VW4301T-0725	VW4301T-0745
Display				
LCD Size	32"		43"	
Display Type	TFT-LED			
Resolution (px x px)	1920 x 1080			
Ratio	16 : 9			
Brightness (nits)	700 nits / 2500 nits	700 nits / 3500 nits	700 nits / 2500 nits	700 nits / 4500 nits
Contrast Ratio	3000 : 1			
Response Time	6ms			
Display Color	16.7M			
Viewing Angle (V° / H°)	178° / 178°			
SoC				
CPU	Quad Core Arm			
RAM	2GB			
Storage	16GB			
Operating System	Android 11.0			
Multimedia & Network				
Audio	MPEG-1 Layers I, II, III 2.0, MPEG-4 AAC-LC 5.1/HE-AAC 5.1/BSAC 2.0, WAV, 24-bit linear PCM 7.1			
Video	Support RM/RMVB, MKV, TS, FLV, AVI, VOB, MOV, WMV			
Picture	Support JPG, BMP, PNG, GIF			
Other Format	PDF, PPT, SWF, Text			
Network	RJ45 R/A 100M Ethernet, 2.4Ghz WiFi 802.11b/g/n protocol, Bluetooth 4.2			
Amplifier	Built-in Dual Audio Amplifier			
Interface				
Input Interface	HDMI 2.0 x 1, USB3.0 x 4, RJ45, SD Card Slot, Power Input, etc.			
Output Interface	HDMI OUT, USB x 2			
Power				
Power Voltage	AC 100~240V @ 50~60Hz			
Power Consumption	≤ 180W		≤ 230W	
Working / Storage Environment				
Working Temperature	-10°C ~ 50°C			
Storage Temperature	-20°C ~ 60°C			
Working Humidity	5% ~ 90% RH			
Storage Humidity	5% ~ 90% RH			
Lifespan	50,000 Hours			
Panel Structure				
Color	Black / White			
Body Structure	Aluminum & Sheet Metal Case			
Display Weight	29 kg		39 kg	
Active Area (mm)	698.6 x 392.9		941.2 x 529.4	
Overall Dimension (W x H x D, mm)	771 x 425.6 x 57		1014 x 562 x 57	
Installation Method	Ceiling Mount			

Model: VW4901T ~ VW5501T


MODEL	VW4901T-0725	VW4901T-0745	VW5501T-0730	VW5501T-0745
Display				
LCD Size	49"		55"	
Display Type	TFT-LED			
Resolution (px x px)	1920 x 1080			
Ratio	16 : 9			
Brightness (nits)	700 nits / 2500 nits	700 nits / 4500 nits	700 nits / 3000 nits	700 nits / 4500 nits
Contrast Ratio	3000 : 1			
Response Time	6ms			
Display Color	16.7M			
Viewing Angle (V° / H°)	178° / 178°			
SoC				
CPU	Quad Core Arm			
RAM	2GB			
Storage	16GB			
Operating System	Android 11.0			
Multimedia & Network				
Audio	MPEG-1 Layers I, II, III 2.0, MPEG-4 AAC-LC 5.1/HE-AAC 5.1/BSAC 2.0, WAV, 24-bit linear PCM 7.1			
Video	Support RM/RMVB, MKV, TS, FLV, AVI, VOB, MOV, WMV			
Picture	Support JPG, BMP, PNG, GIF			
Other Format	PDF, PPT, SWF, Text			
Network	RJ45 R/A 100M Ethernet, 2.4Ghz WiFi 802.11b/g/n protocol, Bluetooth 4.2			
Amplifier	Built-in Dual Audio Amplifier			
Interface				
Input Interface	HDMI 2.0 x 1, USB3.0 x 4, RJ45, SD Card Slot, Power Input, etc.			
Output Interface	HDMI OUT, USB x 2			
Power				
Power Voltage	AC 100~240V @ 50~60Hz			
Power Consumption	≤ 330W		≤ 470W	
Working / Storage				
Environment				
Working Temperature	-10°C ~ 50°C			
Storage Temperature	-20°C ~ 60°C			
Working Humidity	5% ~ 90% RH			
Storage Humidity	5% ~ 90% RH			
Panel Structure				
Color	Black / White			
Body Structure	Aluminum & Sheet Metal Case			
Display Weight	42 kg		46 kg	
Active Area (mm)	1073.8 x 604		1209 x 680.4	
Overall Dimension (W x H x D, mm)	1147 x 637 x 57		1282 x 713 x 57	
Installation Method	Ceiling Mount			

Model: VW5501K ~ VW6501K


MODEL	VW5501K-0725	VW5501K-0735	VW6501K-0725	VW6501K-0730
Display				
LCD Size	55"		65"	
Display Type	TFT-LED			
Resolution (px x px)	3840 x 2160			
Ratio	16 : 9			
Brightness (nits)	700 nits / 2500 nits	700 nits / 3500 nits	700 nits / 2500 nits	700 nits / 3000 nits
Contrast Ratio	3000 : 1			
Response Time	6ms			
Display Color	16.7M			
Viewing Angle (V° / H°)	178° / 178°			
SoC				
CPU	Quad Core Arm			
RAM	2GB			
Storage	16GB			
Operating System	Android 11.0			
Multimedia & Network				
Audio	MPEG-1 Layers I, II, III 2.0, MPEG-4 AAC-LC 5.1/HE-AAC 5.1/BSAC 2.0, WAV, 24-bit linear PCM 7.1			
Video	Support RM/RMVB, MKV, TS, FLV, AVI, VOB, MOV, WMV			
Picture	Support JPG, BMP, PNG, GIF			
Other Format	PDF, PPT, SWF, Text			
Network	RJ45 R/A 100M Ethernet, 2.4Ghz WiFi 802.11b/g/n protocol, Bluetooth 4.2			
Amplifier	Built-in Dual Audio Amplifier			
Interface				
Input Interface	HDMI 2.0 x 1, USB3.0 x 4, RJ45, SD Card Slot, Power Input, etc.			
Output Interface	HDMI OUT, USB x 2			
Power				
Power Voltage	AC 100~240V @ 50~60Hz			
Power Consumption	≤ 470W		≤ 680W	
Working / Storage				
Environment				
Working Temperature	-10°C ~ 50°C			
Storage Temperature	-20°C ~ 60°C			
Working Humidity	5% ~ 90% RH			
Storage Humidity	5% ~ 90% RH			
Lifespan	50,000 Hours			
Panel Structure				
Color	Black / White			
Body Structure	Aluminum & Sheet Metal Case			
Display Weight	46 kg		54 kg	
Active Area (mm)	1209 x 680.4		1428.5 x 803.5	
Overall Dimension (W x H x D, mm)	1282 x 713 x 57		1501 x 836 x 64	
Installation Method	Ceiling Mount			

Technical Drawings



32"

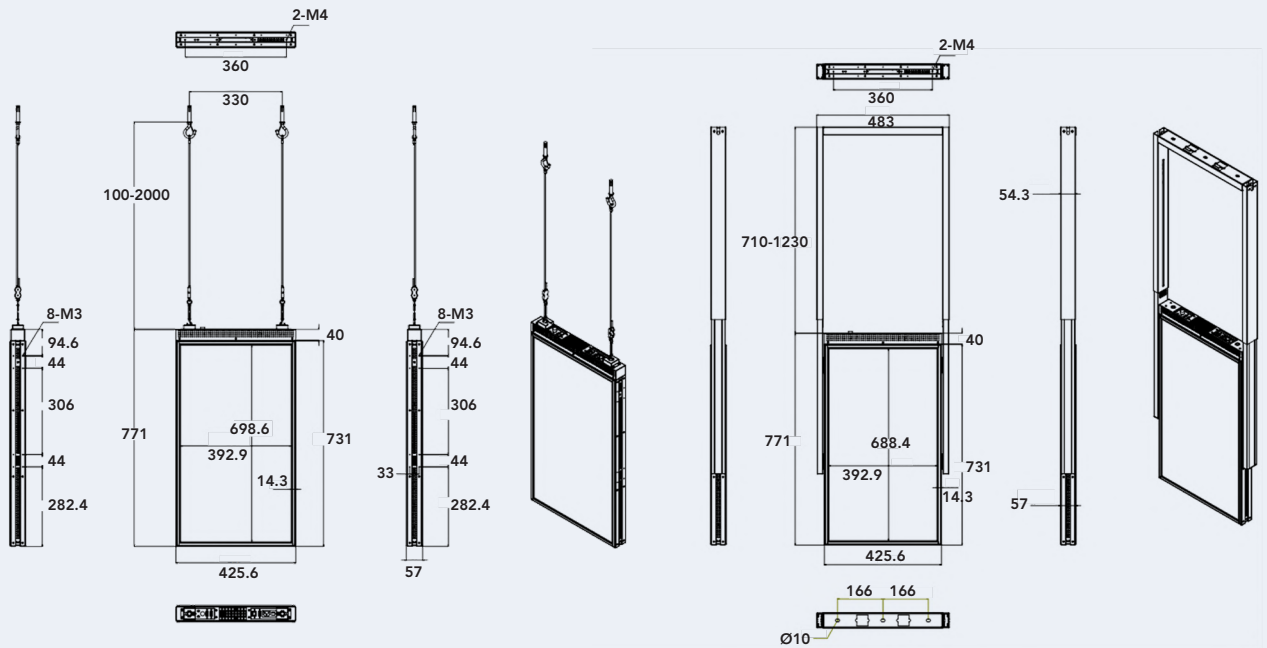

43"

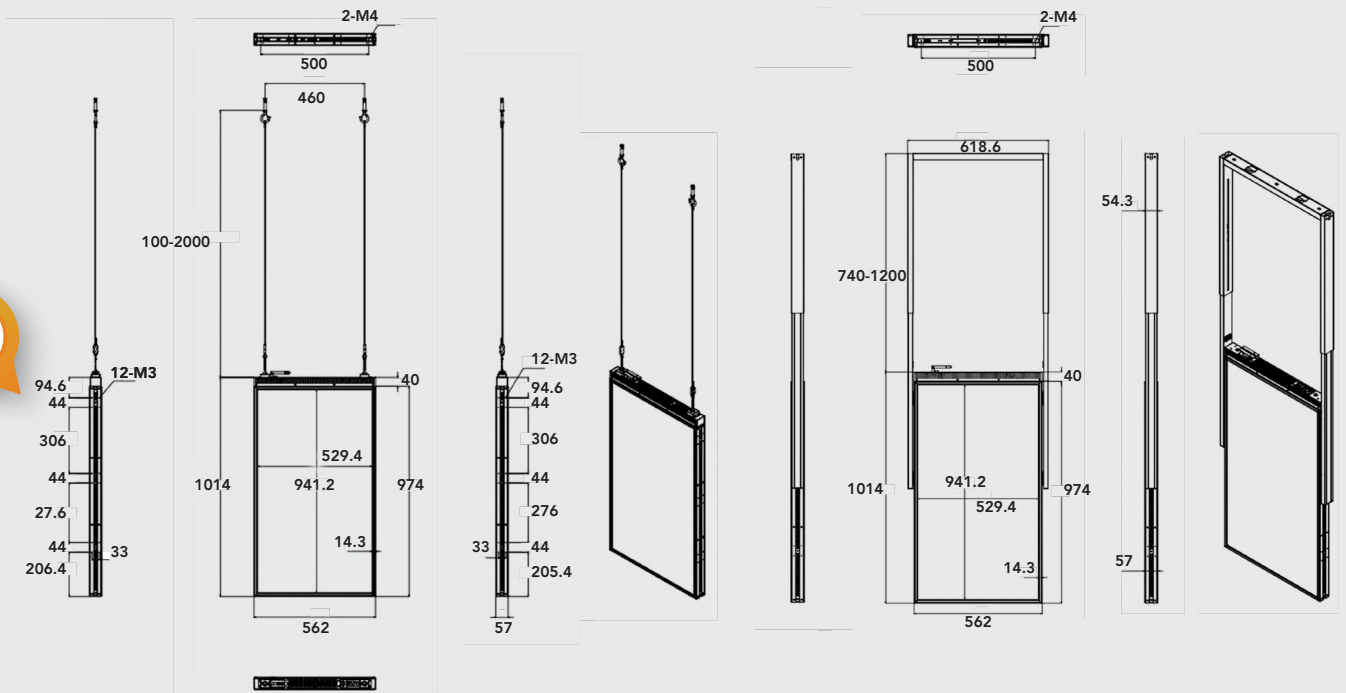

65"

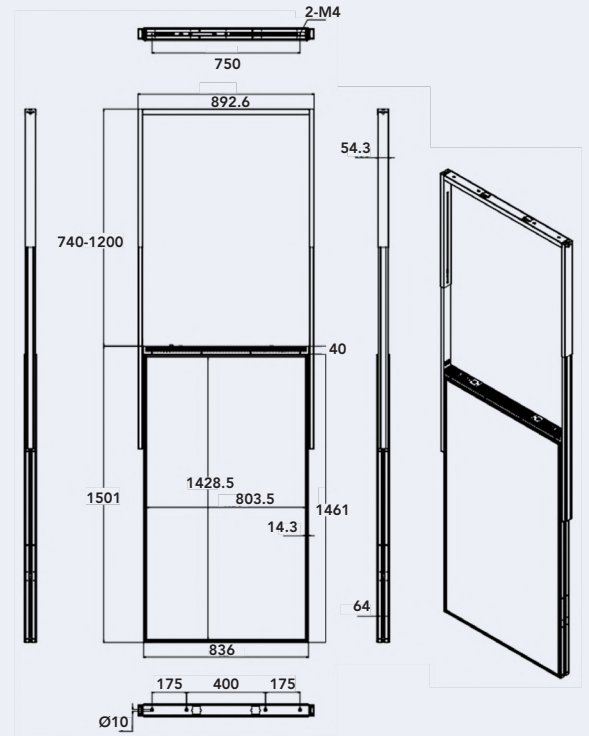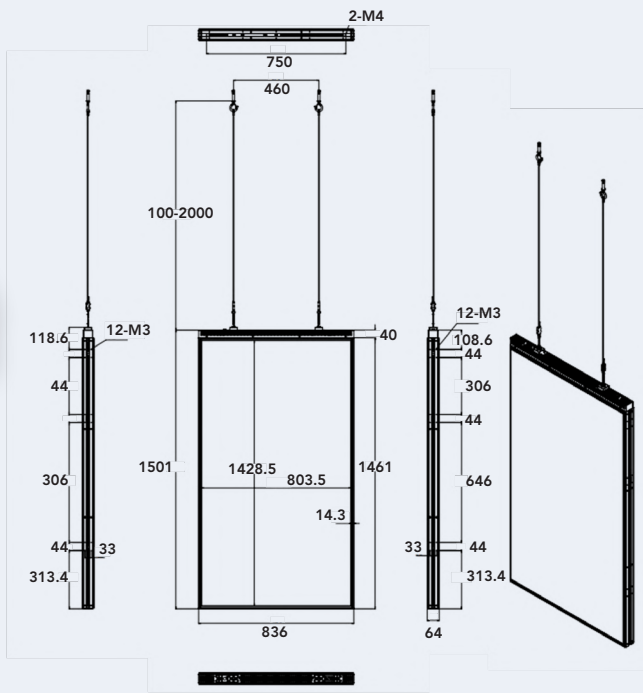

Applications


Retail Stores



Hospitals



Airports

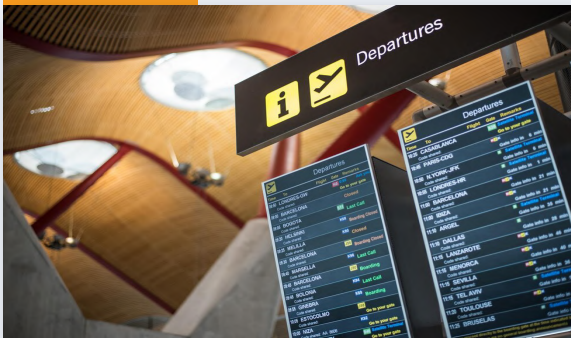

Shopping Malls






*All pictures shown are for illustration purpose only.



V-Series International Sdn Bhd

No. 17, Jalan Anggerik Mokara 31/53,
Kota Kemuning, 40460 Shah Alam,
Selangor D.E., Malaysia

Contact Us

 www.v-series.net
 +6011 1011 1181
 sales@v-series.net

