

VigitSIGN

EvoEdge Series Digital Signage

Narrow & Even Bezel

Flat Back Panel &
Mounting Bracket
Design

4K High Resolution

Ultra Lightweight &
Thin Design



High Brightness
and Contrast



Ultra Slim and
Lightweight Design



Flexible
Installation



Reliable and
Long Lifespan



Introduction

Introducing our advanced slim and even bezel digital signage, which redefines visual experiences with stunning 4K resolution. Crafted from lightweight aluminum, it ensures easy installation, while its high brightness delivers vibrant displays in any environment. This versatile display meets all your signage needs, supporting both landscape and portrait orientations. The flat design of the back panel and mounting bracket allows for seamless wall attachment without gaps, achieving an exceptional aesthetic. Installation is straightforward and requires no wall drilling.

Product Features



4K UHD Resolution

Achieve the restoration of Ultra High Definition resolution original content, providing a more lifelike visual experience.



Narrow & Even Bezel Design

A narrow and even bezel creates a seamless linking visual that enables captivating visual experiences.



High Brightness & Contrast

With 500nits brightness, 1200:1 contrast ratio and anti-glare panels, the display maintains excellent visibility and contrast in any lighting condition.



ZERO Mounting Gap

Flat back panel and mounting bracket design allow for seamless attachment to the wall without gaps.



Ultra Slim & Lightweight Design

Aluminium material for lightweight purposes, offering effortless installation and maintenance.



Reliable & Long Lifespan

Designed for dependable 24/7 operation. With an impressive 50,000-hour lifetime, it ensures a reliable long lifespan.



Flexible Installation

Landscape and portrait installation for flexibility in content design.



The Ultimate Digital Signage Management System


Manage Smarter, Engage Better, Perform Greater.

Everything You Need for a Smarter, Faster Signage

- Remote & Flexible Content Management
- Support for WiFi
- Unlimited Content Looping Playback
- Remote Content Scheduling
- Screen Splicing
- Screen On/Off
- Data Collection & Reporting
- Content Synchronization



Upload



Effortlessly Track, Analyze & Optimize

Our signage software gives you easy-to-use tools to track performance, improve your content, and keep your hardware running smoothly.



100% Secure CLOUD Based System



Support for Multi-Level User Access




Cloud & Local USB Content Update



Live Layout Preview




Real-Time Hardware & Software Monitoring

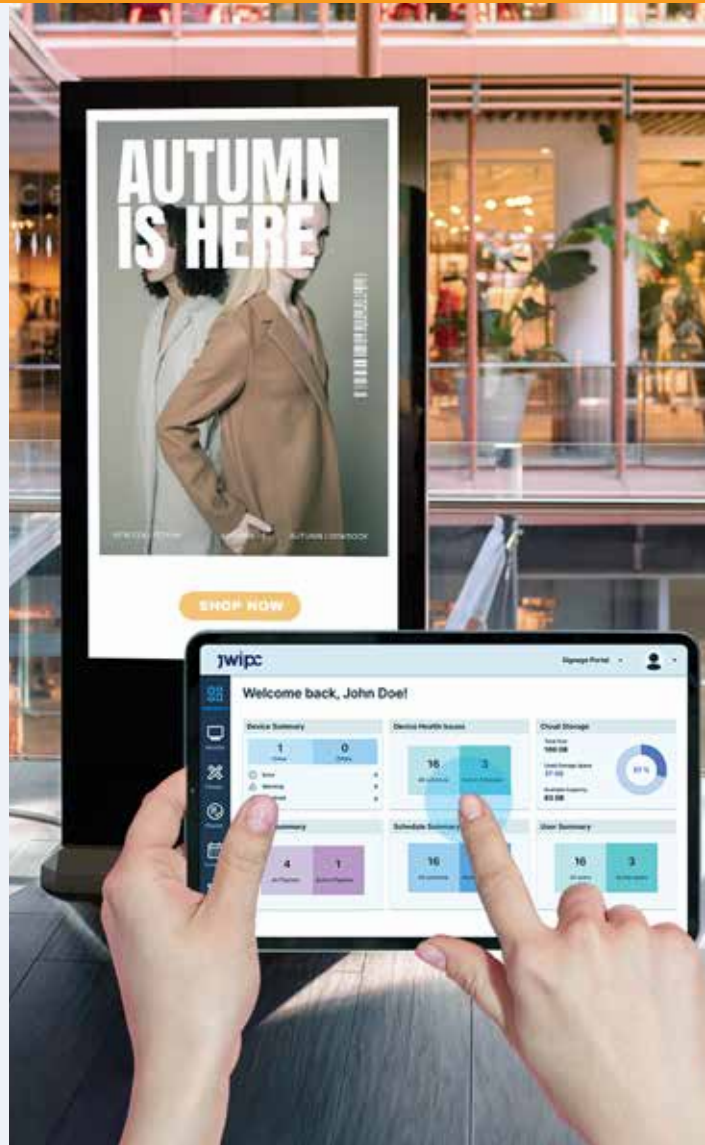


Technical Drawings


32"

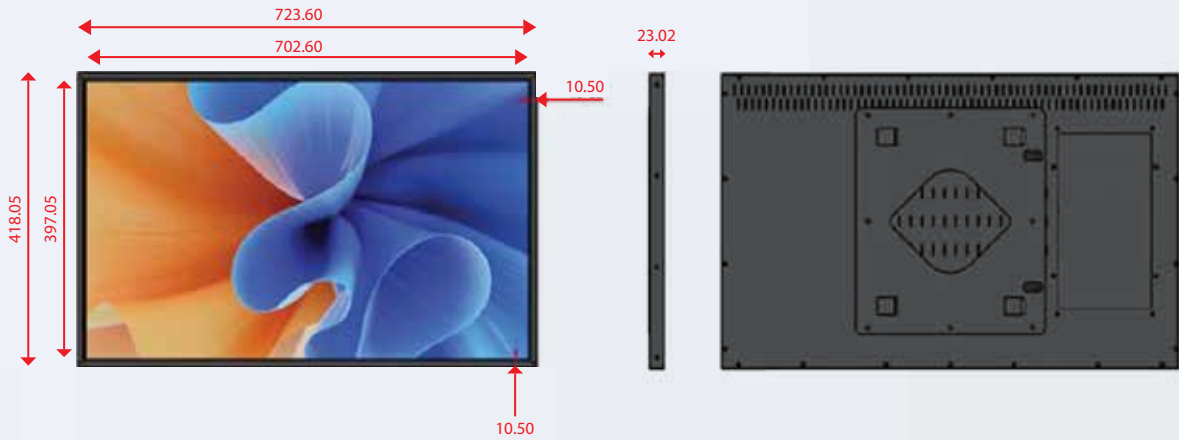

43"


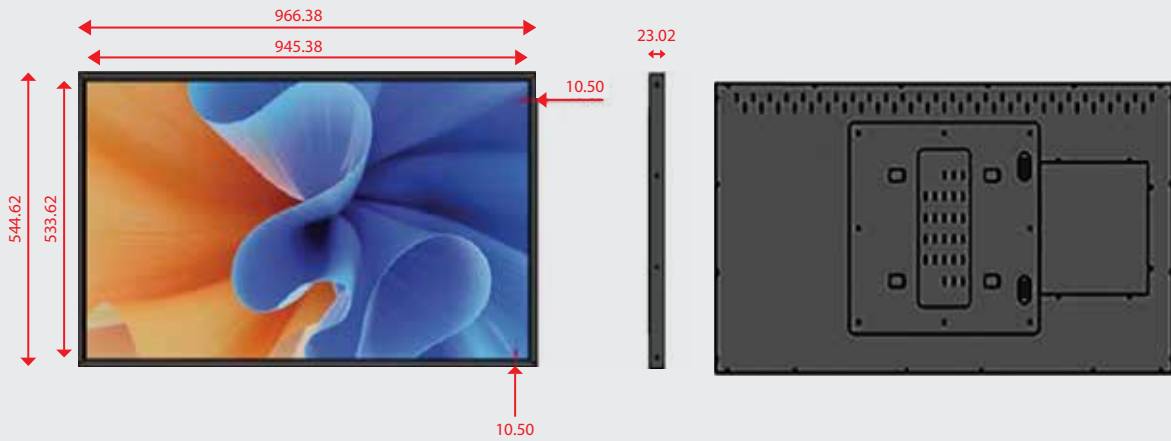


55"


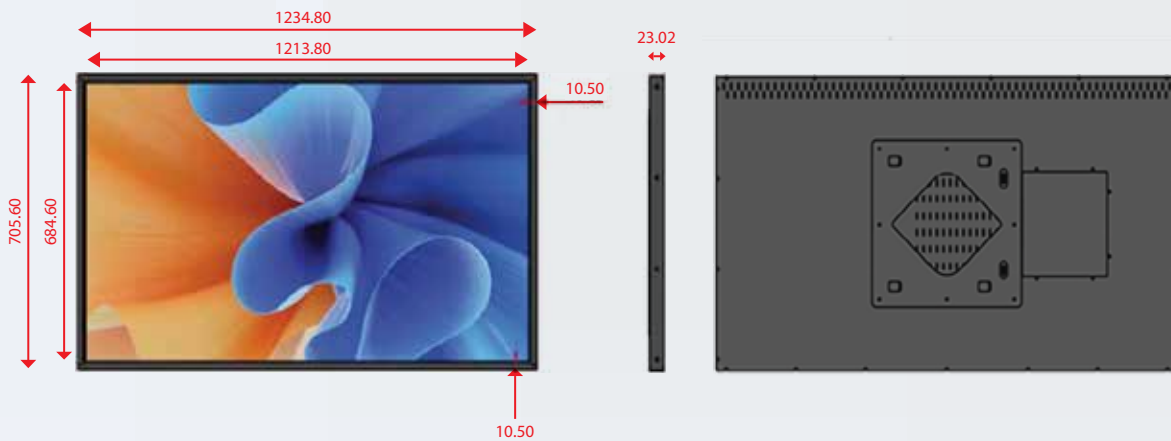


Technical Drawings

65"

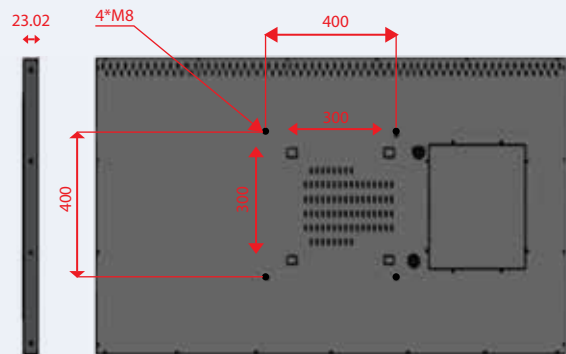
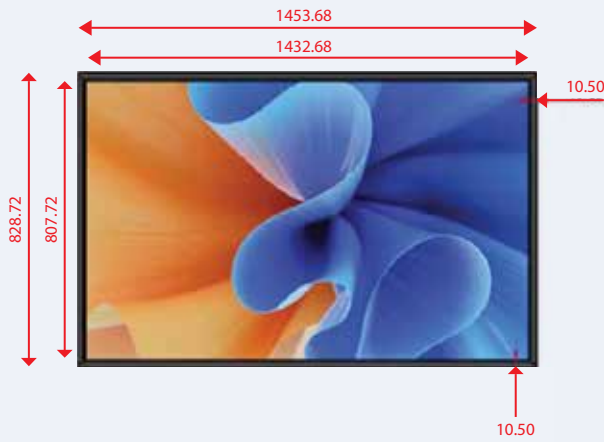


75"

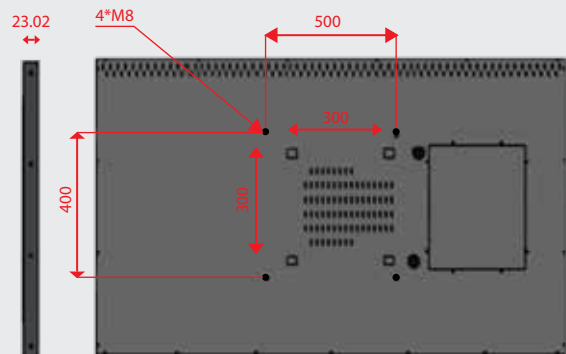
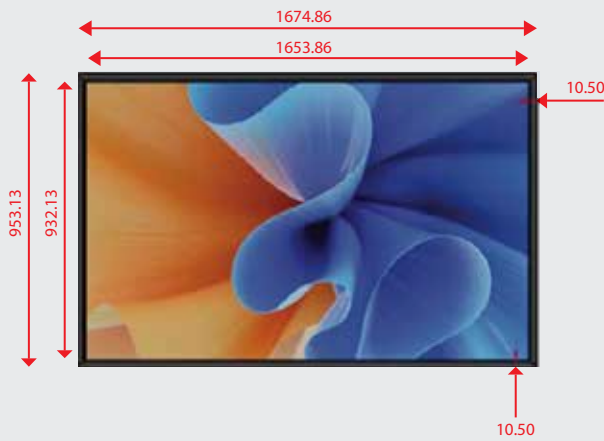


Technical Drawings

85"

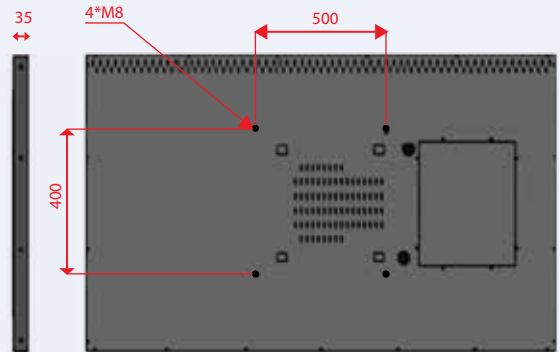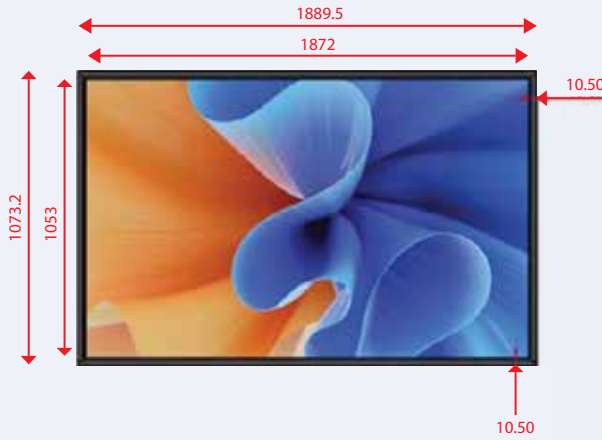


100"

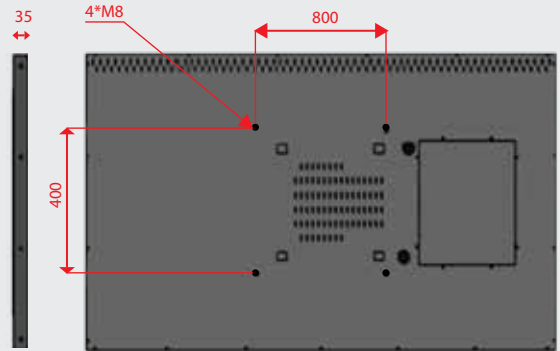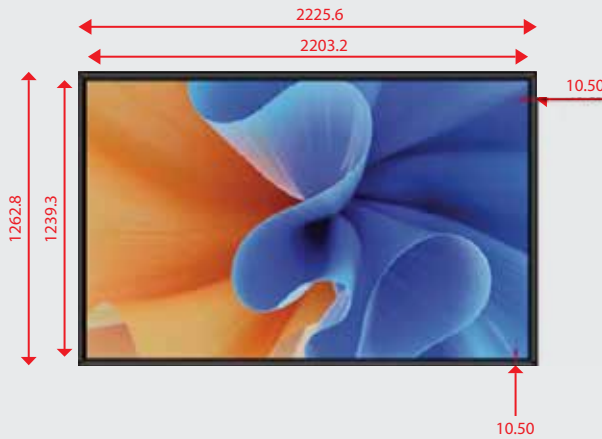


Technical Specifications



Storage
32GB



RAM
4GB



CPU
RK3568




OS
Android 11.0

MODEL	BG3235OB	BG4335OB	BG5535OB	BG6535OB	BG7535OB
Display					
LCD Size	32"	43"	55"	65"	75"
Display Type	TFT-LED				
Resolution	1920px x 1080px		3840px x 2160px		
Ratio	16 : 9				
Brightness (nits)	500				
Contrast Ratio	1200 : 1				
Respond Time	6ms				
Display Colour	16.7M, 90%				
Viewing Angle (V/H)	178° / 178°				
Bezel	10.5mm				
Multimedia & Network					
Audio	MP3, WMA, WAV, APE, FLAC, AAC, OGG, M4A, 3GPP and other formats				
Video	Support H.265, H.264, VP8, MAV, WMV, AVS, H.263, MPEG4 and other video formats				
Picture	Support JPG, BMP, PNG and other image formats				
Built-in APP Default	APK Installer, Email, Calculator, Browser, Voice Recorder, Calendar, Settings, Clock, Video Player, Search, Contacts, Gallery, Downloads, Camera, Music, Explorer, etc.				
Network	RJ45 R/A 100M Ethernet, 2.4Ghz WiFi 802.11b/g/n protocol, Bluetooth 4.2				
Amplifier	Dual Audio Amplifier				
Interface					
Input Interface	HDMI IN x 1, USB3.0 x 2, RJ45, TF Card Slot, Power Input, etc.				
Output Interface	HDMI OUT, USB, AUDIO, etc.				
Power					
Power Voltage	AC 100~240V @ 50~60Hz				
Power Consumption	≤70W	≤85W	≤120W	≤170W	≤230W
Working / Storage Environment					
Working Temperature	-10°C ~ 50°C				
Storage Temperature	-20°C ~ 60°C				
Working Humidity	5% ~ 90% RH				
Storage Humidity	5% ~ 90% RH				
Lifespan	50,000 Hours				
Panel Structure					
Case Color	Black				
Model Structure	Aluminum & Sheet Metal Case				
Display Weight	8.2 kg	10.5 kg	16.5 kg	25 kg	35 kg
Active Area (mm)	702.6 x 397.05	945.38 x 533.62	1213.8 x 684.6	1432.68 x 807.72	1653.86 x 932.13
Display Size (W x H xD, mm)	723.6 x 418.05 x 23.02	966.38 x 554.62 x 23.02	1234.8 x 705.6 x 23.02	1453.68 x 828.72 x 23.02	1674.86 x 953.13 x 23.02
Installation Method	Wall-Mount				


Technical Specifications



Storage
32GB



RAM
4GB



CPU
RK3568



OS
Android 11.0

MODEL	BG8535OB	BG10035OB
Display		
LCD Size	85"	100"
Display Type	TFT-LED	
Resolution	3840px x 2160px	
Ratio	16 : 9	
Brightness (nits)	500	
Contrast Ratio	1200 : 1	
Respond Time	8ms	
Display Colour	16.7M, 90%	
Viewing Angle (V/H)	178° / 178°	
Bezel	10.5mm	
Multimedia & Network		
Audio	MP3, WMA, WAV, APE, FLAC, AAC, OGG, M4A, 3GPP and other formats	
Video	Support H.265, H.264, VP8, MAV, WMV, AVS, H.263, MPEG4 and other video formats	
Picture	Support JPG, BMP, PNG and other image formats	
Built-in APP Default	APK Installer, Email, Calculator, Browser, Voice Recorder, Calendar, Settings, Clock, Video Player, Search, Contacts, Gallery, Downloads, Camera, Music, Explorer, etc.	
Network	RJ45 R/A 100M Ethernet, 2.4Ghz WiFi 802.11b/g/n protocol, Bluetooth 4.2	
Amplifier	Dual Audio Amplifier	
Interface		
Input Interface	HDMI IN x 1, USB3.0 x 2, RJ45, TF Card Slot, Power Input, etc.	
Output Interface	HDMI OUT, USB, AUDIO, etc.	
Power		
Power Voltage	AC 100~240V @ 50~60Hz	
Power Consumption	≤120W	
Working / Storage Environment		
Working Temperature	-10°C ~ 50°C	
Storage Temperature	-20°C ~ 60°C	
Working Humidity	5% ~ 90% RH	
Storage Humidity	5% ~ 90% RH	
Lifespan	50,000 Hours	
Panel Structure		
Case Color	Black	
Model Structure	Aluminum & Sheet Metal Case	
Display Weight	61 kg	-
Active Area (mm)	1872 x 1053	2203.2 x 1239.3
Display Size (W x H xD, mm)	1889.5 x 1073.2 x 35	2225.6 x 1262.8 x 35
Installation Method	Wall-Mount	

Applications

Commercial Building



Shopping Malls



Education Institution



Banks








V-Series International Sdn Bhd

No. 17, Jalan Anggerik Mokara 31/53,
Kota Kemuning, 40460 Shah Alam,
Selangor D.E., Malaysia

Contact Us

 www.v-series.net
 +6011 1011 1181
 sales@v-series.net

