

**VigitSIGN**

# Outdoor Wall-Mount Digital Signage

**Multiple Sizes Available**

**Automatic  
Brightness Control**



FHD Resolution  
Display



High Brightness  
Up to 2000 Nits



Hardware and  
Software Monitoring



100% Secure  
Cloud Connectivity



**IP66 Weatherproof  
Protection**

# Product Features

Extraordinary Viewing Experience Delivering Vivid Colors & Realistic Images.



**FHD Resolution**



**High Brightness Up to 2000 Nits**



**Customized Robust & Ruggedized Enclosure**



**Anti-Rust with Epoxy Power Coating Finishing**



**100% Secure Cloud Connectivity  
+ VigitSIGN Cloud Signage  
Perpetual License**



**Real-time Hardware & Software Monitoring**

## Multiple Sizes Available

Flexible and diverse size options to meet various needs for different environments.



**18.5" to 98"**

# The Ultimate Digital Signage Management System


Manage Smarter, Engage Better, Perform Greater.

## Everything You Need for a Smarter, Faster Signage

- Remote & Flexible Content Management
- Support for WiFi
- Unlimited Content Looping Playback
- Remote Content Scheduling
- Screen Splicing
- Screen On/Off
- Data Collection & Reporting
- Content Synchronization



Upload



Digital Signage

## Effortlessly Track, Analyze & Optimize

Our signage software gives you easy-to-use tools to track performance, improve your content, and keep your hardware running smoothly.



100% Secure CLOUD Based System



Support for Multi-Level User Access




Cloud & Local USB Content Update



Live Layout Preview



Real-Time Hardware & Software Monitoring

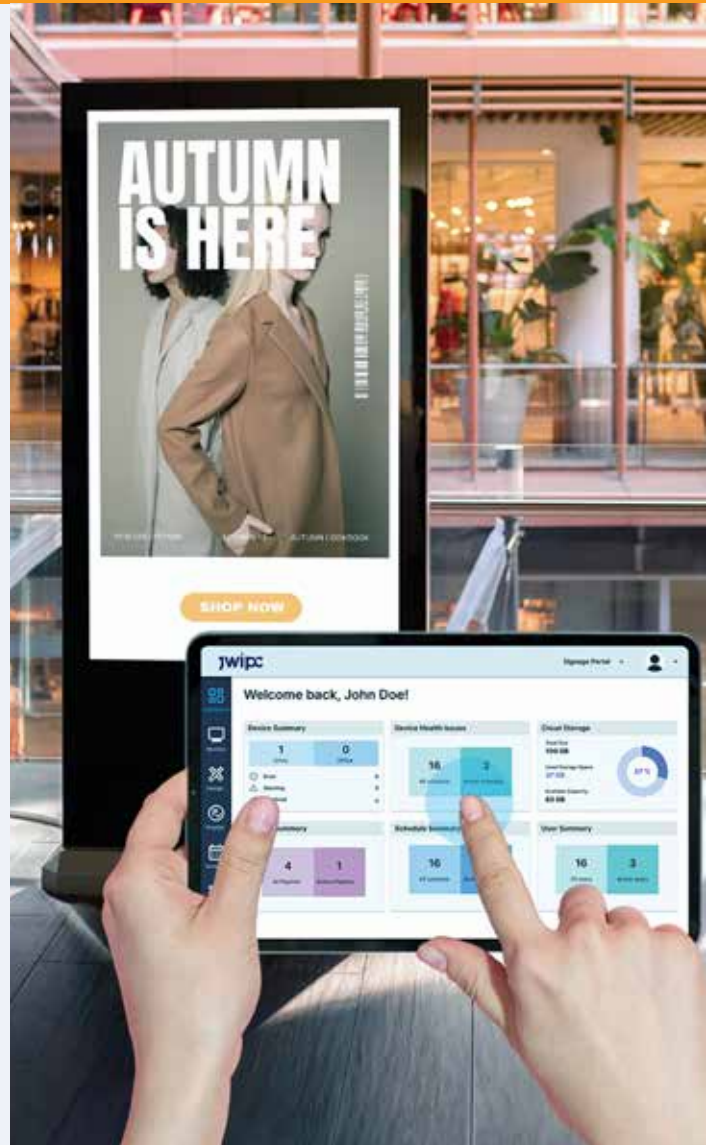


# Technical Specifications



**Storage**  
16GB



**RAM**  
2GB



**CPU**  
Arm Quad Core



**OS**  
Android 8.0

MODEL	VKS0185	VKS0215	VKS0270	VKS0320
<b>Display</b>				
Screen Size	18.5"	21.5"	27"	32"
Active Area (mm x mm)	414 x 236	476 x 268	597 x 336	697 x 392
Aspect Ratio	16 : 9			
Resolution (px x px)	1920 x 1080			
Brightness (nits)	1000	1500		2000
Contrast Ratio	1200 : 1			
Viewing Angle (H/V)	178° / 178°			
Interface	USB 2.0 x 2   HDMI Input x 1   RJ45 x 1			
Protection Level	IP65			
Glass	4mm Explosion Proof Tempered Glass		5mm Explosion Proof Tempered Glass	
Operating Temperature	-30° C ~ +55°C			
Storage Temperature	-40° C ~ +60°C			
Operating Humidity	5% ~ 90% RH			
Storage Humidity	10% ~ 85% RH			
Lifespan	50,000 Hours			
Power Voltage	AC 220V / 50Hz			
Power Consumption	≤85W	200W	≤100W	230W

# Technical Specifications

MODEL	VKS0430	VKS0490	VKS0550	VKS0650
<b>Display</b>				
Screen Size	43"	49"	55"	65"
Active Area (mm x mm)	941 x 530	1074 x 604	1209 x 680	1428 x 803
Aspect Ratio	16 : 9			
Resolution (px x px)	1920 x 1080			3840 x 2160
Brightness (nits)	2000			
Contrast Ratio	1200 : 1			
Viewing Angle (H/V)	178° / 178°			
Interface	USB 2.0 x 2   HDMI Input x 1   RJ45 x 1			
Protection Level	IP65			
Glass	5mm Explosion Proof Tempered Glass		6mm Explosion Proof Tempered Glass	
Operating Temperature	-30° C ~ +55°C			
Storage Temperature	-40° C ~ +60°C			
Operating Humidity	10% ~ 80% RH			
Storage Humidity	5% ~ 90% RH			
Lifespan	50,000 Hours			
Power Voltage	AC 220V / 50Hz			
Power Consumption	300W	380W	400W	550W




MODEL	VKS0750	VKS0860	VKS0980
<b>Display</b>			
Screen Size	75"	86"	98"
Active Area (mm x mm)	1650 x 928	1872 x 1053	2153 x 121.4
Aspect Ratio	16 : 9		
Resolution (px x px)	3840 x 2160		
Brightness (nits)	2000		
Contrast Ratio	1200 : 1		
Viewing Angle (H/V)	178° / 178°		
Interface	USB 2.0 x 4   HDMI Input x 1   RJ45 x 1		
Protection Level	IP65		
Glass	6mm Explosion Proof Tempered Glass		
Operating Temperature	-30° C ~ +50°C		
Storage Temperature	-40° C ~ +60°C		
Operating Humidity	10% ~ 80% RH		
Storage Humidity	5% ~ 90% RH		
Lifespan	50,000 Hours		
Power Voltage	AC 220V / 50Hz		
Power Consumption	1200W	1300W	2180W



## V-Series International Sdn Bhd

No. 17, Jalan Anggerik Mokara 31/53,  
Kota Kemuning, 40460 Shah Alam,  
Selangor D.E., Malaysia

## Contact Us

 [www.v-series.net](http://www.v-series.net)  
 +6011 1011 1181  
 [sales@v-series.net](mailto:sales@v-series.net)

