

VigitSIGN

Digital Standee Solutions



Brightness Up to 800 Nits



Full HD 4K Resolution



100% Secure Cloud Connectivity



Real-time Hardware and Software Monitoring



Captivate

Engage

Inspire



Product Features

Extraordinary Viewing Experience Delivering Vivid Colors & Realistic Images.



Full HD Up to 4K Resolution



Brightness Up to 800 Nits



Customized Robust & Ruggedized Enclosure



Anti-Rust with Epoxy Power Coating Finishing



100% Secure Cloud Connectivity + VigitSIGN Cloud Signage Perpetual License



Multiple Mounting Option (Floor Mounting / Free Standing / Castor Wheel)



Real-time Hardware & Software Monitoring

Software Integration



VigitADMIN

- Cloud Digital Signage



VigitSIGN

- Cloud Centralized Management Software



VigitEYE


Optional

- Easy data tracking, eliminating the need for manual monitoring
- Audience Gender

- Audience View Time Interval (By Face Recognition)
- Audience Group

One Stop Solution

From A to Z, We've got your needs covered.

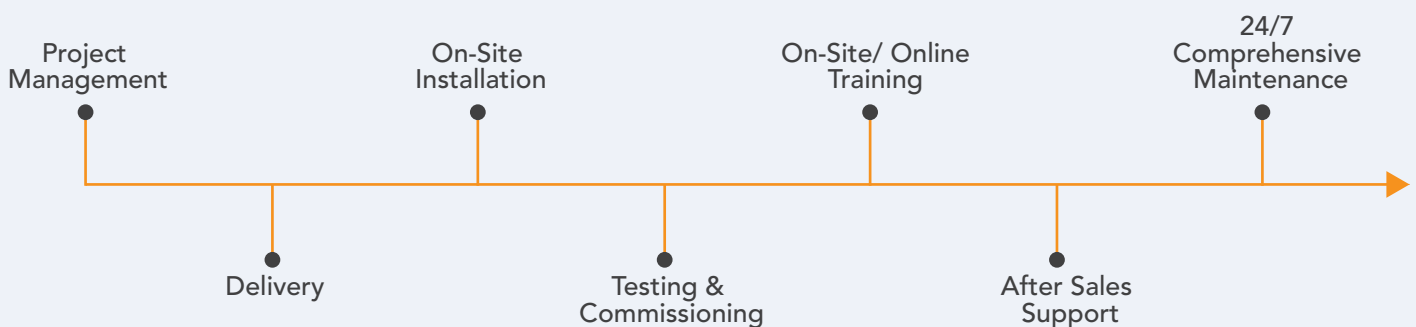

The Ultimate Digital Signage Management System

Manage Smarter, Engage Better, Perform Greater.

Everything You Need for a Smarter, Faster Signage

- Remote & Flexible Content Management
- Support for WiFi
- Unlimited Content Looping Playback
- Remote Content Scheduling
- Screen Splicing
- Screen On/Off
- Data Collection & Reporting
- Content Synchronization



Content


Upload



VigitSIGN Content Management System



Cloud



Digital Signage

Effortlessly Track, Analyze & Optimize

Our signage software gives you easy-to-use tools to track performance, improve your content, and keep your hardware running smoothly.



100% Secure CLOUD Based System



Support for Multi-Level User Access




Cloud & Local USB Content Update



Live Layout Preview




Real-Time Hardware & Software Monitoring

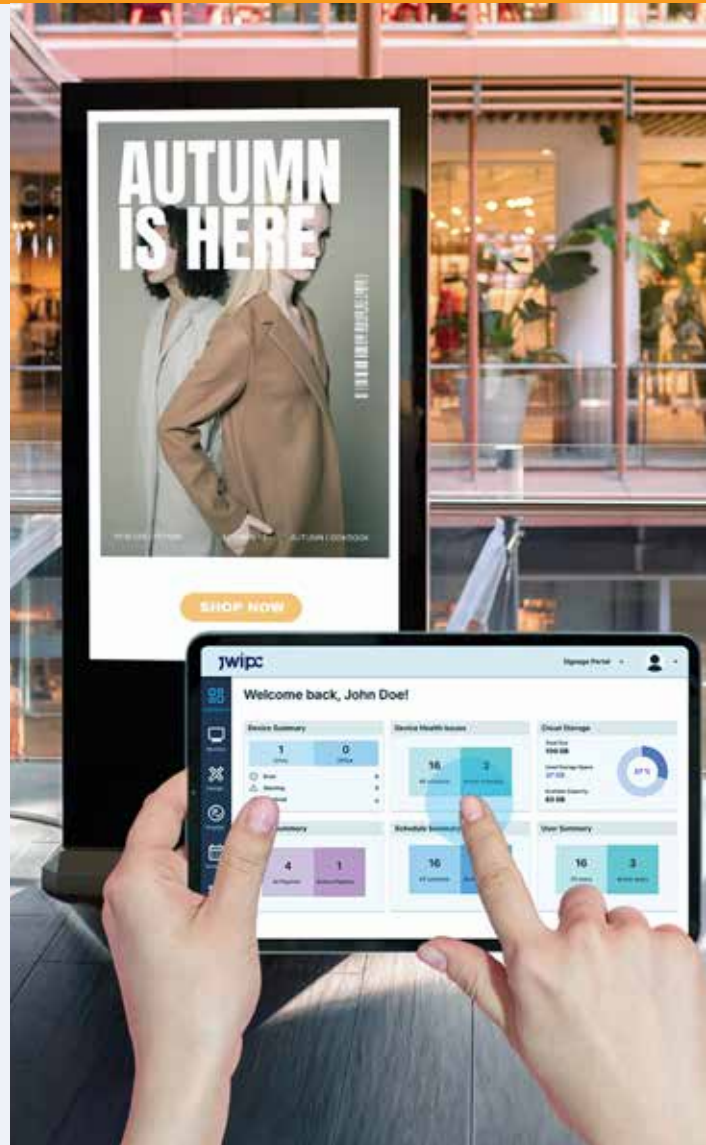


Technical Specifications



Storage
32GB



RAM
4GB



CPU
ARM Quad Core




OS
Android 11.0


MODEL	VKS4313	VKS4913	VKS5513	VKS6513
Display				
Display Size	43"	49"	55"	65"
Active Area (W x H, mm)	528.25 x 939.9	605.5 x 1074.6	679.85 x 1210	805.42 x 1431.48
Overall Dimension (W x H x L ,mm)	604 x 1800 x 85 / 460 (Baseplate)	678 x 1850 x 85/ 460 (Baseplate)	766 x 1900 x 85 460 (Baseplate)	890 x 2050 x 85 520 (Baseplate)
Resolution (W x H, px)	3840 x 2160			
Brightness (nits)	350	350	350	350
Contrast Ratio	1200 : 1			
Display Color	16.7M			
Connectivity	WiFi 6 / LAN			
Interface				
Input	USB 3.0 x1, USB OTG x1, HDMI IN x 1, RJ45, TF Card Slot, Power Input			
Output	AUDIO			
Operation Temperature	-20°C ~ 60°C			
Storage Temperature	10 - 90% RH			
Operation Time (Hrs/day)	24/7			



Storage
256GB



RAM
8GB



CPU
Intel Core i5



OS
Windows
Embedded 10

MODEL	VKS4313-I	VKS4913-I	VKS5513-I	VKS6513-I
Display				
Display Size	43"	49"	55"	65"
Active Area (W x H, mm)	528.25 x 939.9	605.5 x 1074.6	679.85 x 1210	805.42 x 1431.48
Overall Dimension (W x H x L ,mm)	604 x 1800 x 85 / 460 (Baseplate)	678 x 1850 x 85/ 460 (Baseplate)	766 x 1900 x 85 460 (Baseplate)	890 x 2050 x 85 460 (Baseplate)
Resolution (px)	3840 x 2160			
Brightness (nits)	350	350	350	350
Contrast Ratio	1200 : 1			
Display Color	16.7M			
Connectivity	WiFi 6 / LAN			
Interface				
Input	USB 3.0 x1, USB OTG x1, HDMI IN x 1, RJ45, TF Card Slot, Power Input			
Output	AUDIO			
Operation Temperature	-20°C ~ 60°C			
Storage Temperature	10 - 90% RH			
Operation Time (Hrs/day)	24/7			

Applications

Healthcare



Shopping Malls



Education Institution



Retail



Corporate Building



Government Department





*All pictures shown are for illustration purpose only.



V-Series International Sdn Bhd

No. 17, Jalan Anggerik Mokara 31/53,
Kota Kemuning, 40460 Shah Alam,
Selangor D.E., Malaysia

Contact Us

 www.v-series.net
 +6011 1011 1181
 sales@v-series.net

