

VigitLED

X Series

Indoor LED Display



Optimal Brightness Adjustment



Wide Viewing Angle



Energy Conservation



Modular Design for Easy Maintenance

Front Maintenance

Ultra-Thin Design



High Contrast Ratio

High Refresh Rate

Up to 7680Hz

The Ultimate Digital Signage Management System


Manage Smarter, Engage Better, Perform Greater.

Everything You Need for a Smarter, Faster Signage

- Remote & Flexible Content Management
- Support for WiFi
- Unlimited Content Looping Playback
- Remote Content Scheduling
- Screen Splicing
- Screen On/Off
- Data Collection & Reporting
- Content Synchronization



Upload



Digital Signage

Effortlessly Track, Analyze & Optimize

Our signage software gives you easy-to-use tools to track performance, improve your content, and keep your hardware running smoothly.



100% Secure CLOUD Based System



Support for Multi-Level User Access




Cloud & Local USB Content Update



Live Layout Preview



Real-Time Hardware & Software Monitoring

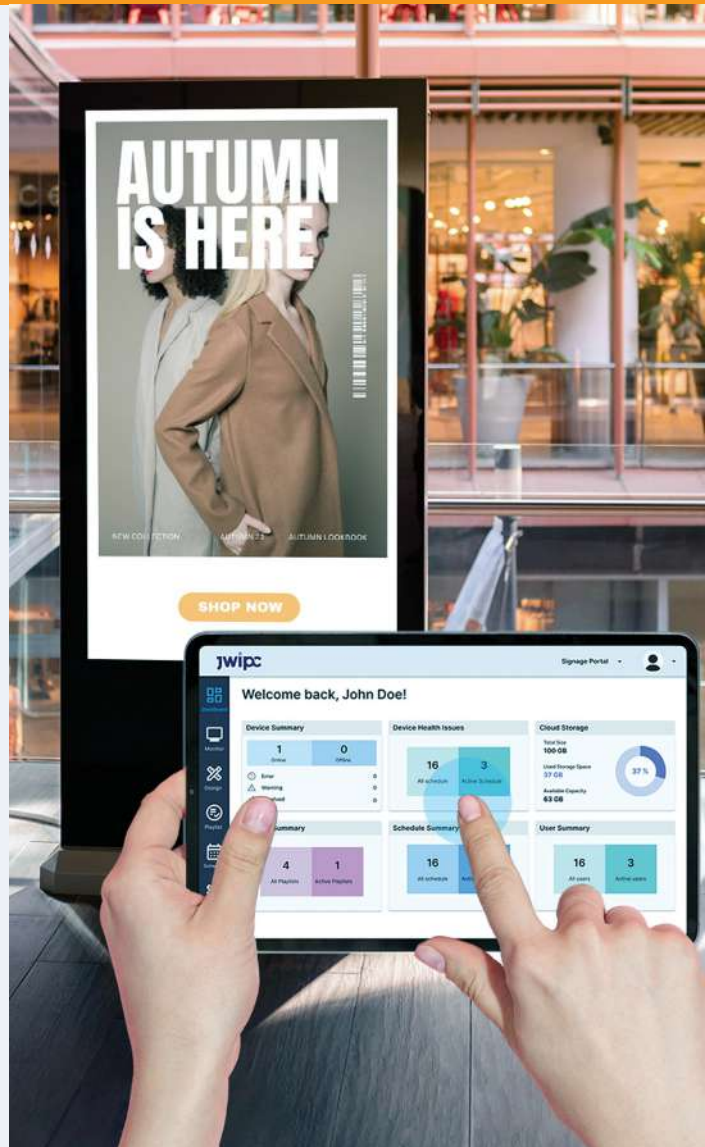

Technical Specifications

MODEL	VigitLED-X1.25	VigitLED-X1.538	VigitLED-X1.86	VigitLED-X2	VigitLED-X2.5	VigitLED-X3.076	VigitLED-X4
Pixel Pitch (mm)	1.25	1.538	1.86	2	2.5	3.076	4
Module Dimension (mm)	320mm x 160mm						
Module Resolution (W x H, px)	256 x 128	208 x 104	172 x 86	160 x 80	128 x 64	104 x 52	80 x 40
Cabinet Dimension (W x H x D,mm)	640mm x 480mm x 48mm (Optional: 640mm x 640mm / 320mm x 480mm)						
Resolution per Cabinet	512 x 384	416 x 312	344 x 172	320 x 240	256 x 192	208 x 156	160 x 120
Overall Weight	6 ± 0.02 kg	5.1 ± 0.02 kg	5.52 ± 0.02 kg	5.52 ± 0.02 kg	5.7 ± 0.02 kg	4.9 ± 0.02 kg	4.9 ± 0.02 kg
Brightness (nits)	≥500						
Refresh Rate	3,840Hz						
Frame Rate	50 / 60						
Grey Scale	14 - 16 bit						
Contrast Ratio	5000 : 1						
Color Temperature	2000 - 9500						
Viewing Angle (V/H)	140° / 140°						
Input Voltage	AC 90 ~ 132V						
Max. Power Consumption	586 ± 10% Wm ²	488 ± 10% Wm ²	488 ± 10% Wm ²	586 ± 10% Wm ²	586 ± 10% Wm ²	488 ± 10% Wm ²	488 ± 10% Wm ²
Storage Temperature	-20°C ~ +55°C						
Operating Temperature	-20°C ~ +45°C						
Storage Humidity	10%RH ~ 85%RH						
Operating Humidity	10%RH ~ 80%RH						
Lifespan	≥100,000 Hours						

Applications

Meeting Room



Data & Command Centre



Sales Gallery



Retail



Shopping Mall



Airport






*All pictures shown are for illustration purpose only.



V-Series International Sdn Bhd

No. 17, Jalan Anggerik Mokara 31/53,
Kota Kemuning, 40460 Shah Alam,
Selangor D.E., Malaysia

Contact Us

 www.v-series.net
 +6011 1011 1181
 sales@v-series.net

